



Model: YXD43P

Version number : WA5

43-inch portable display

Product pictures



Product size

1750*593*48 h * w * t (mm)


Application Pictures




Hotel




Bank

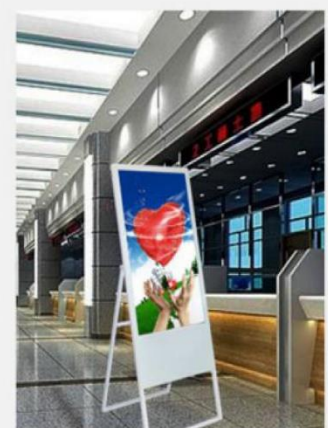

Cafe

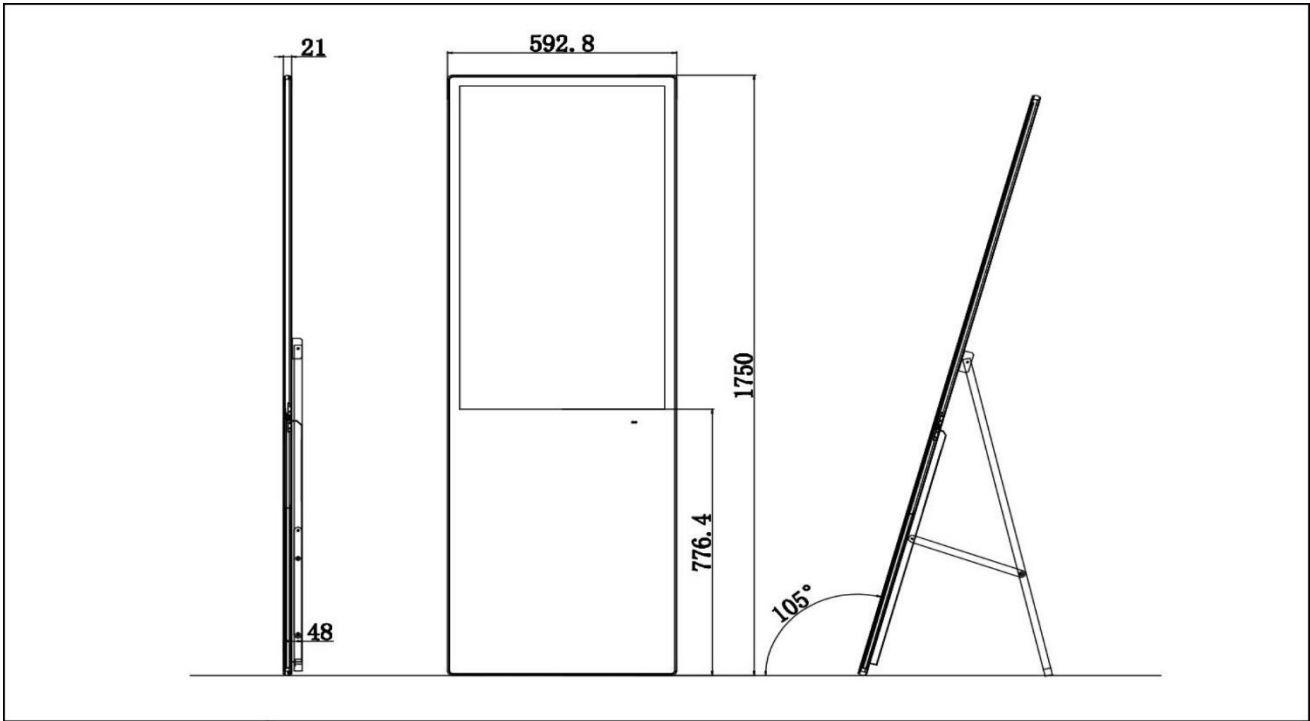

<p>Product characteristics</p>	<p>3D digital filtering and noise reduction, progressive scanning, real and delicate picture; Intelligent screen protection function, anti burn; Multiple HD signal interfaces, strong compatibility; Intelligent backlight brightness control, improve the visual effect of the image, save energy and power. Intelligent temperature control and heat dissipation / heating system ensures stable operation of the machine in the best environment.</p>
<p>Broadcasting system</p>	<p>Each playing area can be arranged and layered freely, and can be played horizontally and vertically. The screen area can be divided freely, and pictures, audio, video, webpage, clock, date, subtitle, mixed material editing can be combined. It supports program and playlist preview, real-time monitoring of playing picture, multi-stage timing on / off setting, and automatic reset. Different users can set different operation permissions. Adopt distributed management, support remote or local control. It supports Android mobile phone or tablet end-to-end broadcast terminal to send program list, remote monitoring and timing on-off function. The brightness of the screen is automatically adjusted according to the surrounding environment. Support all kinds of regular audio / video, and office documents. Support wired, WiFi, RJ45, 4G networks.</p>
<p>Product name</p>	<p>Specification parameter</p>
<p>Display</p>	<p>LCD SCREEN: 43" TFT screen, screen ratio: 16:9 Resolution: 1920 * 1080 Display Area: 940*529 point distance: 0.49 * 0.49 contrast: 3000:1 brightness: 500 CDM2 Response Time: 8ms Angle: Horizontal / Vertical</p>
<p>Main board plan</p>	<p>Motherboard: rk3288 quad core main frequency 2.0GHz memory: 2GB Built in storage: EMMC 8g (expandable 64g) operating system: Android6.0</p>

Interface		
parts	Manual, remote control, warranty card, certificate of conformity, power cord	
product mix	Product architect	Hardware Iron Plate + Paint Process+Aluminium Alloy frame
	Installation mode	Floor type
	Protective glass	4MM STEEL
	weight	36kg
	Product size	1750*593*48 (mm)
	Packing dimension	1830*673*128 (mm)
Operating parameter	Brightness control	
	temperature	Operating temperature: 0 ° C to + 45 ° c operating humidity: 5% to 90%
	work environment	
	Power Supply	AC110~240V 60HZ
	power	80W