

## DS-D6055FL-B/S

### Indoor Standing Digital Signage

Standing digital signage is used to broadcast information, release news, advertise products, etc., which is widely applicable to industry of entertainment, finance, traffic, etc.



### Main Features

- **Metallic Appearance**

Light weight body with integrative design. The front high-transmittance tempered glass provides reliable protection.

- **Exquisite Image**

Industrial A+ interface, auto-coloring and image-enhancing engine.

- **Variable Materials**

Static and dynamic materials, including pictures, audio, video, scrolling subtitle, PDF, webpage, live video, number calling, pop-up pictures, etc.

- **Flexible Program Schedule**

- Free schedule and district display of multiple materials.
- Multiple play modes with customization support.

- **Centralized Management**

- Remotely control and manage one or more screens, such as timed startup/shutdown, quick startup/shutdown, brightness/volume timed adjustment, and screenshot preview.
- Remote program release and local (USB) program update.

- **Organization Permission**

- 5-level organization available for managing materials, programs, terminals, and users.
- Create custom user with precise permission assignment. Multiple permission templates available.

- **Multiple Security Safeguards**

- 3-level check of materials, programs, and schedules to prevent mistake release. Screensaver password to protect displaying.
- Encryption of data storage and transmission to avoid data tampering.
- With no default password, users can activate and set initial password to guarantee the password safety.




## Specifications

Model		DS-D6055FL-B/S
Display	Screen size	54.5 inch
	Screen active zone	1209.6(H) x 680.4(V) mm (476.22 x 267.87 inch)
	Backlight	LED backlight
	Pixel pitch	0.21 x 0.63 mm
	Resolution	1920 x 1080@60 Hz
	Brightness	450 cd/m <sup>2</sup>
	Visual angle	Horizontal: 178°, Vertical: 178°
	Color depth	8 bit
	Contrast	3500 : 1
	Response time	6.5 ms
	Refresh rate	60 Hz
	Color gamut	72% NTSC
Built-in system	Operating system	Android 6.0.1
	CPU	Cortex-A17, 4-core, 1.8 GHz
	Memory	2 GB
	SD Card	8 GB EMMC, TF 32 GB
Interface	Video & audio output	/
		1 x AUDIO OUT 2 x Built-in loudspeaker
	Network interface	1 x LAN, Wi-Fi
	Data transmission interface	2 x USB, 1 x TF Card
General	Material type	Supports DAT, MPG, VOB, TS, AVI, MKV, MP4, MOV, 3GP, TS, FLV, WEBM, ASF, MP1, MP2, MP3, WMA, WAV, OGG, OGA, FLAC, ACC, M4A, XMF, MXMF, RTTTL, RTX, OTA, IMY, JPG, JPEG, BMP, GIF, PNG
	Power	100 to 240VAC, 50/60 Hz
	Consumption	≤ 150 W
	Standby consumption	≤ 10 W
	Working temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working humidity	0% to 90%
	Product dimensions	1958.2 (H) x 680.4 (V) x 450 (D) mm (77.09 x 26.79 x 17.72 inch)
	Packing dimensions	2100 (H) x 916 (V) x 303 (D) mm (82.68 x 36.06 x 11.93 inch)
	Net weight	66.190 kg (145.92 lb.)
	Gross weight	81.190 kg (178.99 lb.)
Accessory	Screen, Base, Key, Screw Kit, Installation Manual	


## Available Model

DS-D6055FL-B/S

## Accessory Device

Model	Material Code	Description	Picture
DS-D60S-B	302501753	Information release management server (integration of software and hardware)	

## Typical Application

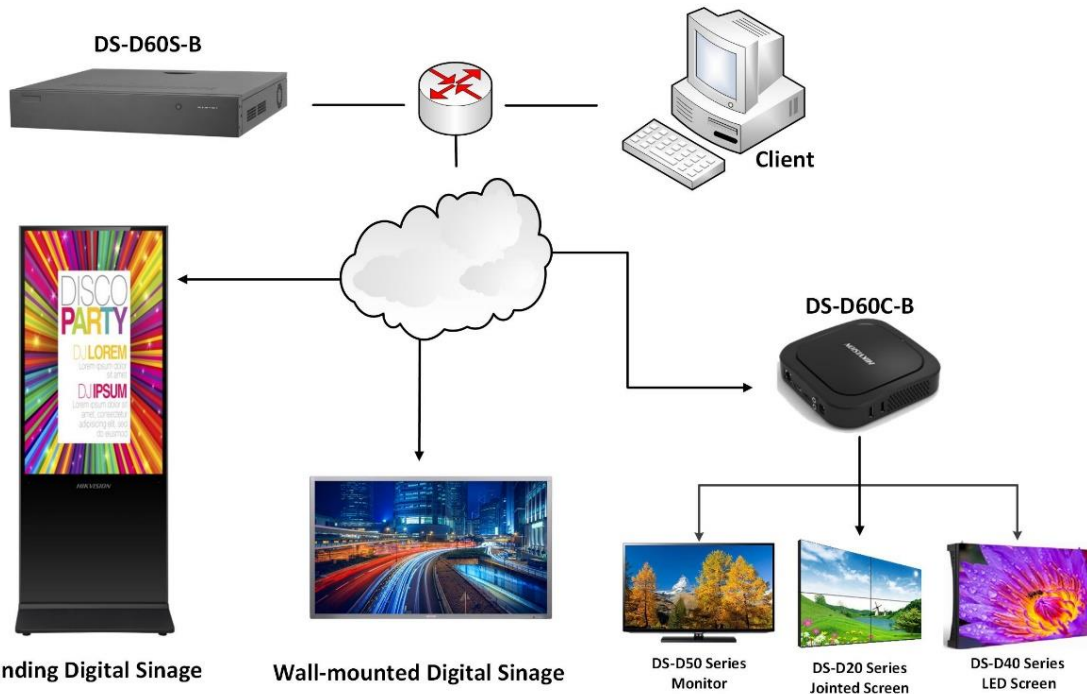

Distributed by **Standing Digital Sinage**

**Wall-mounted Digital Sinage**

**DS-D50 Series Monitor**

**DS-D20 Series Jointed Screen**

**DS-D40 Series LED Screen**

# HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com